

**LEGEND**

Site Boundary

**FENCING**

Existing Boundary Fence (to be retained)  
Repairs and making good as required.

Proposed metal railing  
1.8m high, powder coated black

Proposed metal railing  
1.2m high, powder coated black

Proposed close board FSC timber fencing  
2.4m high

Proposed weldmesh fencing  
3m high

**GATES**

Proposed double leaf gate - Fire Access (Large)  
Minimum 4.5m wide clear opening. 180 degrees swing to gates.

Proposed double leaf gate - Fire Access  
Minimum 3.7m wide clear opening.


Proposed double leaf gate - General Maintenance  
Minimum 3m wide clear opening.

Proposed double leaf gate - General Pedestrian Access  
Minimum 2.4m wide clear opening.

Proposed double leaf gate - Bin/Services Compound Access  
Minimum 2m wide clear opening.

**NOTE:**

- For levels and drainage information refer to engineers plans and details.
- All roof rain water run-off to discharge via green roof system or rain gardens.
- All other landscaping borders are purely ornamental with no dual drainage function.

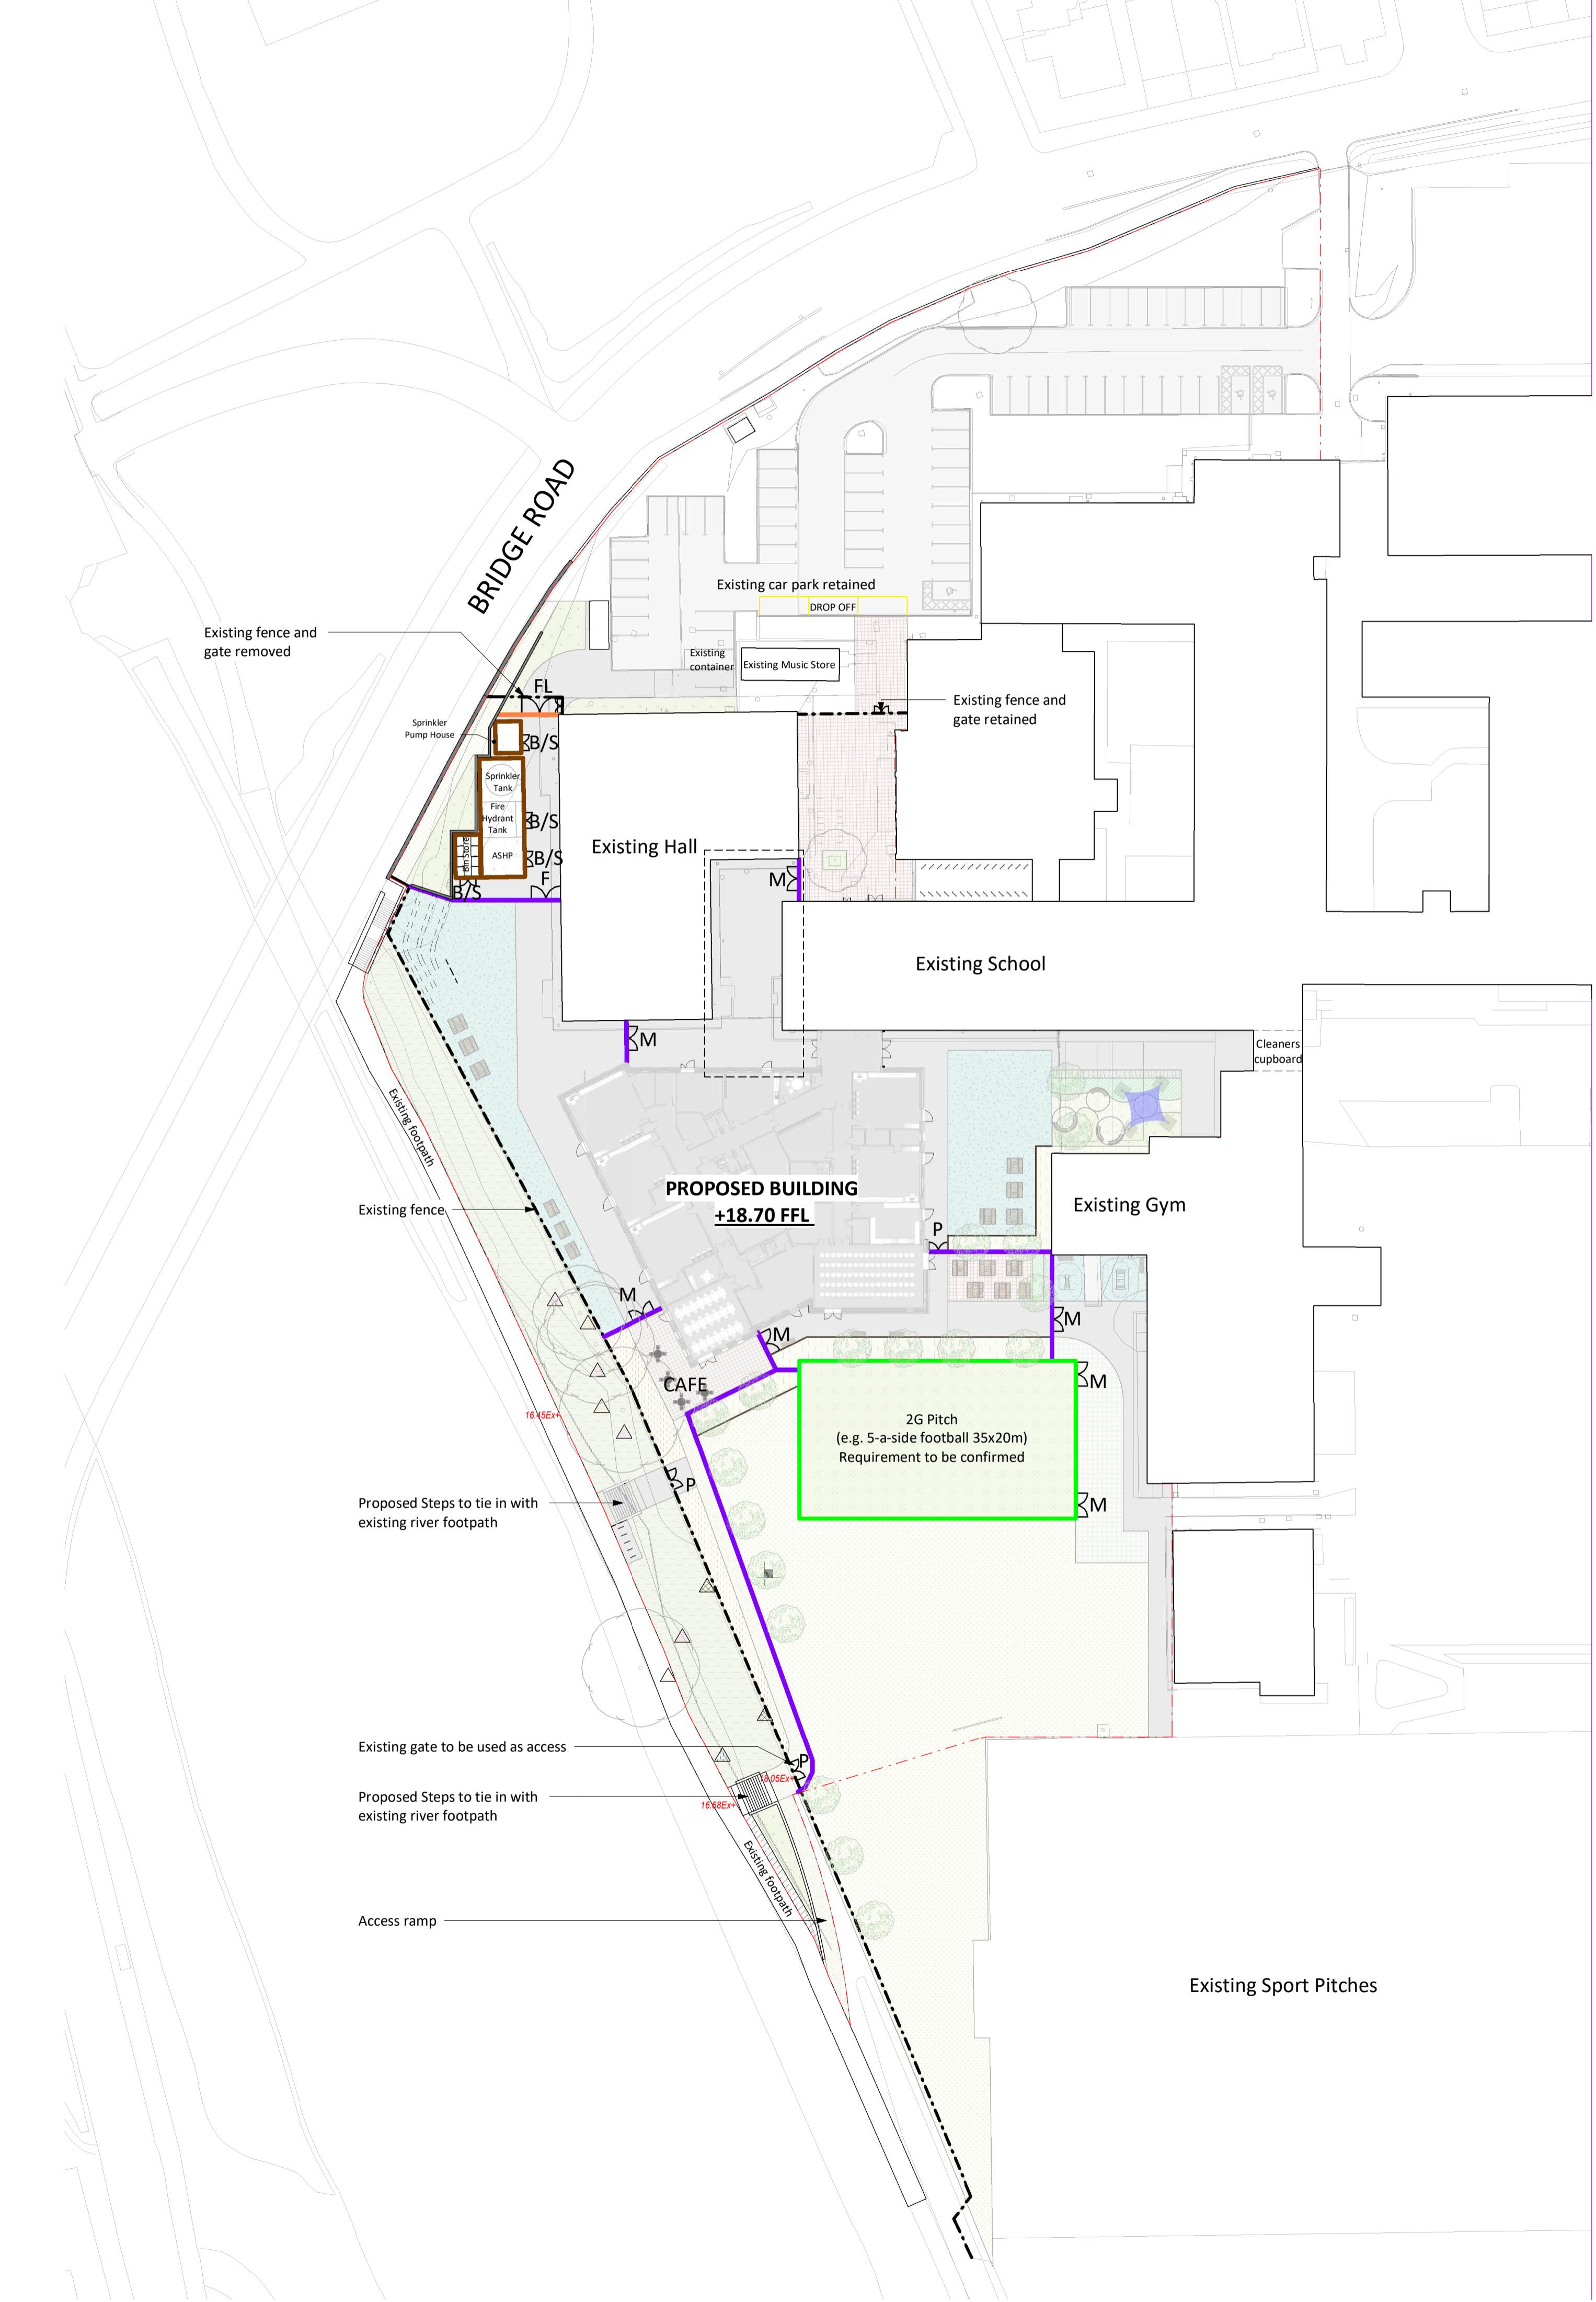

S4	P36	01/11/23	Update to PAC
S4	P32	28/09/23	Updates to landscape design following client meeting/feedback
S4	P29	22/09/23	STAGE 3 ISSUE

STATUS	REV	DATE	DESCRIPTION	REVISED BY
				CMS
				CS
				155452

CONSULTANT  
**STRIDE TREGLOWN**  
www.stridetreglow.com © Stride Treglow Limited 2020

PROJECT  
**Ysgol Glantaf SRB**  
Bridge Road, Cardiff CF14 2JL

DRAWING TITLE  
**Landscape Fencing Plan**

STATUS CODE  
**S4 : Suitable for stage approval** SCALE  
**1 : 500@A1**

DRAWING USAGE:  
PROJECT - ORIGINATOR - VOLUME - LEVEL - TYPE - ROLE - CLASS - NUMBER STATUS - REVISION  
**GSRB-STL-XX-XX-DR-L-09180 S4\_P36**